

## RS 6" Series

### Random Sidedrive Carton Sealer

The BestPack™ RS 6" Series is a Semi-Automatic Random Tape Carton Sealer in our incredibly flexible RS line, built for speed and rugged dependability using 6" wide tape. With side belt drives, the RS-6 easily seals a wide range of random carton weights and sizes. Able to effectively seal very light to very heavy cartons, BestPack's RS Series sealers are workhorses and the most flexible units in our random carton sealer product line. The RS-6 is perfect for random applications needing extra security, tamper protection, and pilferage prevention, and also effectively seals cartons that are overly heavy, over-filled, or otherwise difficult to keep sealed.

All BestPack units are available in our standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.



## Key Points of the Carton Sealer



Operator Fed



Random Cartons



Top & Bottom Seal

### Features

- Heavy Duty 2mm CNC Cut and Welded Frame Including Upper Welded Legs
- Random Side Belt Drive System with 1-piece Molded Belts and V-belt Guide
- Accepts 6", 4", 3" and 2" Pop-out BestPack High Speed Tape Heads
- Electrical On/Off Box can also be Easily Mounted on Either Side of the Sealer (Left Side is Standard)
- Uses Heavy Duty SMC Oil-less Cushioned Air-cylinders
- Adjustable Bed Height for RS22-6 and 6M – 20.5" to 30.0"
- Tape Roll Lengths: 1,000 yd., 1,500 yd., 2,000 yd.
- Upper Random Mast is Tapped and Drilled that can be Raised (Un-bolted, Raised and Re-bolted) for an Extra 4" Carton Height if Needed
- Quality UL Approved Electrical Parts

### Options

- Infeed/Exit Conveyor w/L-Bracket Stabilizer
- Heavy Duty Dual Locking Casters
- Spare Parts Kit
- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Interlock Safety Gates
- Food Grade 304 Stainless Steel

# Extra Accessories to Improve Efficiency




Carton Sealing Tape



Locking Casters



Long Infeed/Exit Conveyor  
w/ L-Bracket

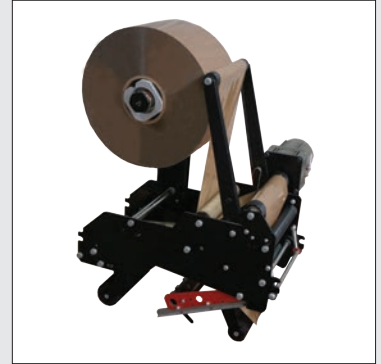

6" Spare Tape Head  
(optional motorized  
assist shown)

- High Speed Motor Upgrade (Up to 125 ft.)
- Spare Parts Kit
- Food Grade 304 Stainless Steel
- Short Infeed/Exit Conveyor w/L-Bracket

## Machine & Carton Specifications

**110 Volts 60 Hz**  
Power Requirements

**Up to 15 Cartons/min.**  
Speed

**60-75 PSI**  
5 SCFM  
Air Requirements

**475 lbs**  
Shipping Weight

Model	Machine Dimensions Length x Width x Height	Carton Range* Length (min. - max.) x Width (min. - max.) x Height (min. - max.)	Conveyor Height Adjustment Height (min. - max.)	Cartons per min.	Shipping Weight (lbs.)
RS 22-6 <b>2" Tape Head</b>	(42.9") x (34.8") x (71.8")	(6.0" - U) x (8.5" - 21.0") x (4.0" x 20.5")	(20.5" - 30.0")	Up to 15	475
RS 22-6M** <b>6" Motor Assist Tape Head</b>	(42.9") x (34.8") x (71.8")	(6.0" - U) x (8.5" - 21.0") x (4.0" x 20.5")	(20.5" - 30.0")	Up to 15	475

Information subject to change without notice.

U - Unlimited

\* Outside Dimensions Only

All Models available in High Speed & Food Grade 304 Stainless Steel

\*\* Motorized assist tape heads when high speed motors and/or acrylic tapes are used