

AS-S

Automatic Uniform Sidedrive Carton Sealer (AS)

The BestPack™ AS-Stainless Steel Series is an operator-free carton sealer designed to meet the needs of uniform in-line carton closure applications in wet environments. Designed with a solid four column support structure and using dual motor side belt technology, the AS-S closes all four top flaps and seals the top & bottom of the carton, using 45-60 PSI and 4-5 SCFM of air.

All BestPack stainless steel units are crafted with food grade 304 stainless steel for 21 CFR 110 compliance and available in splash resistant or wash down models. The AS-S also includes our exclusive stainless steel 2" or 3" pop-out pressure-sensitive "High Speed" tape heads with BestPack's patented tab adjustment.



Interlock gates in the flap folding section are included but not shown in the above picture.

Key Points of the Carton Sealer



**No Operator
Required**



Uniform Cartons



Top & Bottom Seal

Features

- Heavy Duty 2mm Food Grade 304 Stainless Steel Welded Frame Including Upper Welded Legs
- Side Belt Drive System with 1-piece Molded Belts and V-belt Guide
- Accepts 2" and 3" Pop-out BestPack High Speed Food Grade 304 Stainless Steel Tape Heads
- Width and Height Adjustment Crank Handles can be Mounted on Either Side of the Sealer
- Heavy Duty Upper Assembly Four Post System
- Aluminum Framed Interlock Safety Gates in the Kicker Station
- Uses Heavy Duty SMC Oil-less Cushioned Air-cylinder
- Electrical Box is Mounted on the Left Side of the Sealer
- Adjustable Bed Height 22.5" to 30.0"
- Tape Roll Lengths: 1,000 yd., 1,500 yd., 2,000 yd.
- Quality UL Approved Electrical Parts

Options

- Spare Parts Kit
- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Food Grade 304 Stainless Steel Locking Heavy-Duty Casters
- Aluminum Framed Interlock Safety Gates for the Major Flap Folding and Sealing Stations
- Compatible Indexer: ARX Model

Extra Accessories to Improve Efficiency




Spare Parts Kit



Indexer Station



Stainless Steel Locking Casters

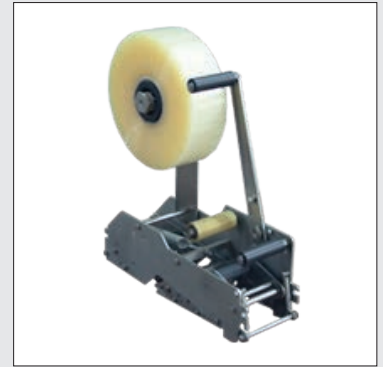

Spare Tape Head

- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Food Grade 304 Stainless Steel Long Infeed/Exit Conveyor w/ L-Bracket Stabilizer
- Low Tape or No Tape Sensor
- Carton Sealing Tape

Machine & Carton Specifications

110 Volts 60 Hz
Power Requirements

Up to 34 Cartons/min.
Speed

45 - 60 PSI, 4 - 5 CFM
Air Requirements

500-585 lbs
Shipping Weight

Model	Machine Dimensions Length x Width x Height	Carton Range** Length (min. - max.) x Width (min. - max.) x Height (min. - max.)	Conveyor Height Adjustment Height (min. - max.)	Cartons per min.***	Shipping Weight (lbs.)
AS 12-2 S 2" Tape Head	(70.2**) x (26.5") x (68.0")	(6.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	(22.5" - 30.0")	Up to 34	527
AS 12-3 S 3" Tape Head	(70.2**) x (26.5") x (68.0**)	(6.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	(22.5" - 30.0")	Up to 34	527
AS 22-2 S 2" Tape Head	(77.7**) x (33.8") x (69.0")	(6.0" - 27.5") x (6.0" - 20.0") x (5.5" - 20.0")	(22.5" - 30.0")	Up to 34	616
AS 22-3 S 3" Tape Head	(77.7**) x (33.8") x (69.0**)	(6.0" - 27.5") x (6.0" - 20.0") x (5.5" - 20.0")	(22.5" - 30.0")	Up to 34	616

Information subject to change without notice.

U - Unlimited
All Models available in High Speed
*Safety Gates are an additional 20" Long
** Outside Dimensions Only
*** Based on a 12" long carton