

ATFXU Series

Automatic Fruit Box Carton Sealer

The BestPack ATFXU Series is an operator-free carton sealer designed to cater to the heavy duty needs of HSC carton usage. Using pressure sensitive tape to seal cartons, the ATFXU was designed for oranges, lemons, potatoes, and other produce. It has four stations: an indexer station, a positive outer sleeve lifting station with vibration that is activated only if the outer sleeve does not lift, a flap folding station, leading to a final station which seals the top and bottom flaps, leaving the top and bottom flaps sealed but not tabbed together.



Our ATFXU line incorporates our exclusive 2" or 3" pop-out pressure-sensitive "High Speed" tape heads with BestPack's patented tab adjustment. All BestPack units are available in our standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.

Key Points of the Carton Sealer



Does Not Require Operator



Uniform Cartons



Top & Bottom Seal

Features

- Heavy Duty 3mm Frame
- Unique Positive Outer Sleeve Lifting Station
- Rear Minor Flap Side Action Kicker
- SMC Maintenance Free, Oil-less Air Cylinders with Air Cushion
- Capable of Interchanging 2" or 3" High Speed BestPack Tape Heads
- High Speed Top and Bottom Belt Drive System
- Quick Change Belt Drive Assembly Tracks
- Belt Drives are Equipped w/ a "V" Guide
- Self Centering Guide Rails
- Width/Height Adjustment on Either Side of Carton Sealer
- Adjustable Compression Rollers
- Interlock Safety Gates
- Tape Roll Lengths: 1,000 yd., 1,500 yd., 2,000 yd.
- UL Approved Electrical Parts
- Heavy Duty Casters

Sealer Includes Four Stations:

- 1) An Indexer Station
- 2) A Positive Outer Sleeve Vibrating Lifting Station, the Vibration Performs Only if the Outer Sleeve of the Carton Fails to Lift.
- 3) A Flap Fold Station Closes the Top Flaps.
- 4) A Final Station Seals the Top and Bottom Flaps Leaving the Top and Bottom Flaps Sealed But Not Tabbed Together.

Options

- Spare Parts Kit
- Low and/or No Tape Alarm & Sensor System
- Infeed/Exit Conveyor w/ L-Bracket
- Food Grade 304 Stainless Steel

Extra Accessories to Improve Efficiency




*Spare Parts Kit May Vary

Spare Parts Kit



Carton Sealing Tape

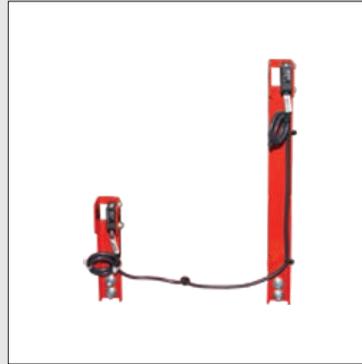

Low Tape/No Tape
Sensor & Alarm



Spare Tape Head

- Food Grade 304 Stainless Steel
- Replacement Tracks

Machine & Carton Specifications

220 Volts 3 Phase

6 Amps, 10:1 Ratio, 1/5 hp
Power Requirements

Up to 38 Cartons/min.

Speed

90 PSI

8 SCFM
Air Requirements



1,098 lbs

Shipping Weight

Model	Machine Dimensions Length x Width x Height	Carton Range Length (min. - max.) x Width (min. - max.) x Height (min. - max.)	Conveyor Height Adjustment Height (min. - max.)	Cartons per min.	Shipping Weight (lbs.)
ATFXU-2 2" Tape Head	(107.5") x (40.3") x (58.7")	(16.7" - 23.3") x (11.6" - 15.3") x (5.3" - 10.5")	(24.0" - 31.0")*	Up to 38	1098
ATFXU-3 3" Tape Head	(107.5") x (40.3") x (58.7")	(16.7" - 23.3") x (11.6" - 15.3") x (5.3" - 10.5")	(24.0" - 31.0")*	Up to 38	1098

Information subject to change without notice.

*Other Conveyor Heights Available

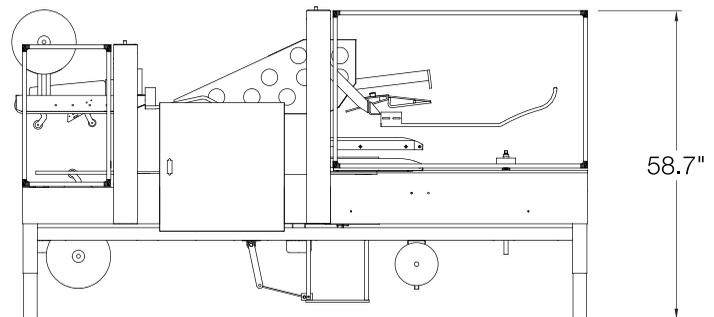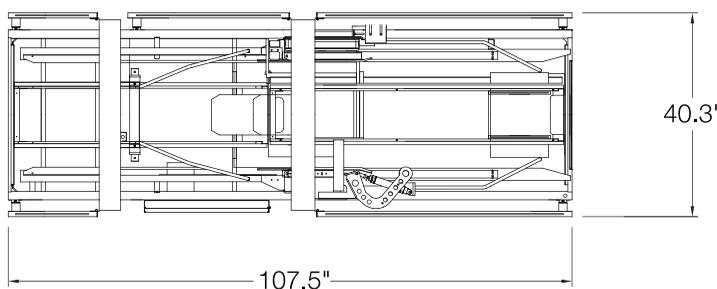

Note: Dimensions are all subject to change without prior notification. Call BestPack for pricing.