


CRX

Used for Centering & Timing Random Cartons

The CRX is a center and timing unit that is intended to function in front of modified RS or RQ Top and Bottom Semi-Automatic Random Carton Sealers. Combining the CRX and the modified RS or RQ Sealer, these two units will then function as a fully automatic random carton sealing system. The CRX automatically centers and times a carton into the modified Semi-Automatic Random Sealer thereby allowing the sealer to function as a Fully Automatic Carton Sealer. This application requires the top flaps to have been already closed and tabbed closed by either a label or a small piece of tape before being completely sealed top and bottom by the random sealer. The two units cost much less than a standard fully automatic random sealer and has a smaller footprint where space may be an issue.

All BestPack units are available in our standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.

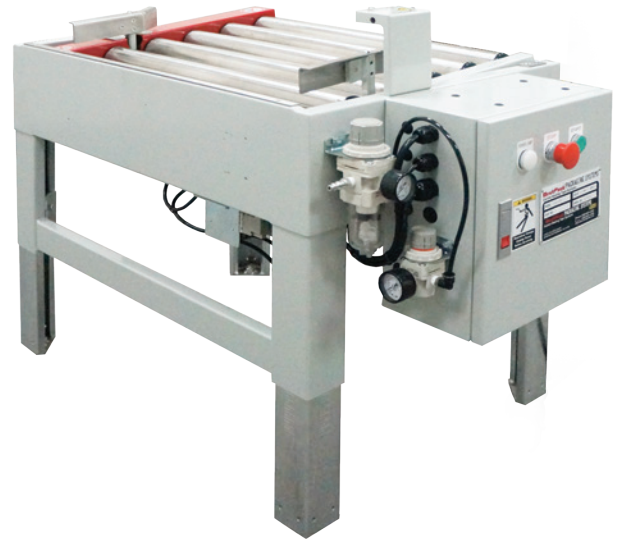

Key Points of the Carton Sealer



**No Operator
Required**



Random Cartons



Indexing

Features

- Heavy Duty 2mm Welded Steel Frame
- Random Self-centering Arms to Center the Carton Before the Carton is Fed into the Sealer Station.
- Powered Rollers with a Drop and Stop Feature for Positive Carton Timing Into the Modified RS or RQ Sealer
- Adjustable Timer Connected to the Powered Rollers for Random Carton Space Separation Allowing the Carton to Feed Completely Through the Sealer Before Allowing the Next Random Sized Carton in to the Sealer.
- Oil-less High Quality SMC Pneumatic Air Cylinder for Long Lasting Dependable Service
- UL Approved Electrical Parts

Extra Accessories to Improve Efficiency



High Speed Motor Upgrade
(Up to 125 ft. per min.)



Locking Casters



Custom Interlock Gates
(Special Order)



On/Off Switch

- Leg Extension

Machine & Carton Specifications

110 Volts 60 Hz
Power Requirements

Up to 10 cartons/min.
Speed

90 PSI 5 SCFM
Air Requirements

260 lbs
Shipping Weight

Model	Machine Dimensions Length x Width x Height	Carton Range Length (min. - max.) x Width (min. - max.) x Height (min. - max.)	Conveyor Height Adjustment Height (min. - max.)	Cartons per min.	Shipping Weight (lbs.)
CRX20H	(39.5") x (22.5") x (25.0")	(9.0" - 30.0") x (6.3" - 20.0") x (4.0" - 21.0")	(20.5" - 30.0")	Up to 10	260