

MSD Stainless

Manual Sidedrive Dual Mast (Stainless Sealer)

The BestPack™ MSD 304 Stainless Steel Series Semi-Automatic Uniform Tape Carton Sealer is our operator-fed and adjustable carton sealer designed to cater to the needs of light-to-heavy duty uniform carton closure applications where there are wet environments. Units are available for either splash resistant or wash-down applications.

All systems incorporate our exclusive pop out pressure sensitive “High Speed” tape heads with patented tab adjustment, and the dual (telescopic) masts allow for an extra 4" carton height extension on the upper assembly.

All BestPack stainless steel sealers are made with food grade 304 stainless steel for 21 CFR 110 compliance and include food grade 304 stainless steel High Speed tapeheads. Available in 2" or 3" tape heads.



Key Points of the Carton Sealer



Operator Fed



Uniform Cartons



Top & Bottom Seal

Features


- Heavy Duty 2mm Food Grade 304 Stainless Welded Frame Including Upper Welded Legs
- Side Belt Drive System with Idler Rollers Behind the 1-piece Die Molded Belts that also Includes V-belt Guide
- Accepts 2" and 3" Pop-out Food Grade 304 Stainless Steel BestPack High Speed Tape Heads
- Telescopic Mast Design with Screw Drive Shafts and a Unique 4 Roller Upper Side Compression Unit
- Width and Height Adjustment Crank Handles can be Mounted on Either Side of the Sealer
- Electrical Box is Mounted on the Left Side of the Sealer
- Adjustable Bed Height for: MSD22 & MSD32 – 23.5" to 30.0"
MSD23 & MSD33 – 25.8" to 30.0"

- Tape Roll Lengths: 1,000 yd., 1,500 yd., and 2,000 yd.
- Upper Telescopic Mast is Tapped and Drilled that can be Raised (Un-bolted, Raised and Re-bolted) for an Extra 4" Carton Height if Needed
- Quality UL Approved Electrical Parts

Options

- Food Grade 304 Stainless Steel Infeed/Exit Conveyor w/ L-Bracket Stabilizer
- Food Grade 304 Stainless Steel Heavy Duty Dual Locking Casters
- Spare Parts Kit
- High Speed Motor Upgrade (Up to 125 ft. per min.)
- 3 Flap Folder
- Aluminum Frame Interlock Safety Gates

Extra Accessories to Improve Efficiency

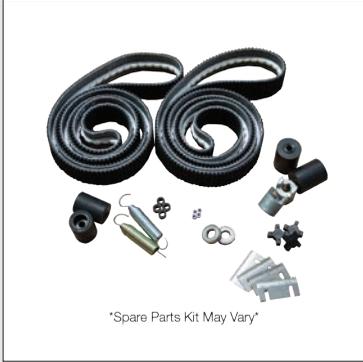

Spare Parts Kit May Vary

Spare Parts Kit



Food Grade 304 Stainless Steel Locking Casters



Food Grade 304 Stainless Steel Long Infeed/Exit Conveyor w/ Unique L-Bracket



Food Grade 304 Stainless Steel High Speed Spare Tape Head

- High Speed Motor Upgrade (Up to 125 ft.)
- 3 Flap Folder
- Food Grade 304 Stainless Steel Short Infeed/Exit Conveyor w/ L-Bracket
- Carton Sealing Tape

Machine & Carton Specifications

110 Volts 60 Hz
Power Requirements

Up to 40 Cartons/min.
Speed

None
Air Requirements

360-432 lbs
Shipping Weight

Model	Machine Dimensions Length x Width x Height	Carton Range* Length (min. - max.) x Width (min. - max.) x Height (min. - max.)	Conveyor Height Adjustment Height (min. - max.)	Cartons per min.	Shipping Weight (lbs.)
MSD22-2S 2" Tape Head	(39.5") x (32.8") x (70.3")	(6.0" - U) x (4.25" - 20.0") x (3.5" - 20.5")	(23.5" - 30.0")	Up to 40	360
MSD22-3S 3" Tape Head	(39.5") x (32.8") x (70.3")	(6.0" - U) x (5.25" - 20.0") x (3.5" - 20.5")	(23.5" - 30.0")	Up to 40	360
MSD23-2S 2" Tape Head	(39.5") x (32.8") x (80.3")	(6.0" - U) x (4.25" - 20.0") x (3.9" - 30.0")	(25.8" - 30.0")	Up to 40	411
MSD23-3S 3" Tape Head	(39.5") x (32.8") x (80.3")	(6.0" - U) x (5.25" - 20.0") x (3.9" - 30.0")	(25.8" - 30.0")	Up to 40	411
MSD32-2S 2" Tape Head	(39.5") x (43.8") x (70.3")	(6.0" - U) x (4.25" - 30.0") x (3.5" - 20.5")	(23.5" - 30.0")	Up to 25	432
MSD32-3S 2" Tape Head	(39.5") x (43.8") x (70.3")	(6.0" - U) x (5.25" - 30.0") x (3.5" - 20.5")	(23.5" - 30.0")	Up to 25	432

Information subject to change without notice.

U - Unlimited
All Models available in High Speed
*Outside Dimensions Only