


MS Bottom Only

BOTTOM ONLY CARTON SEALER

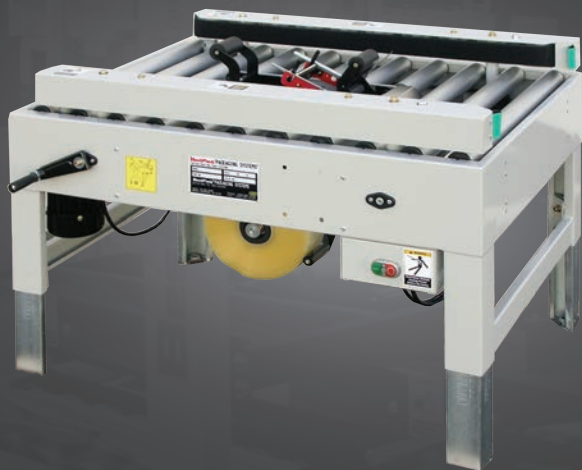


The BestPack™ MS20 Series Bottom Sealer Tape Carton Sealer is our most popular. The unit is an operator-fed adjustable carton sealing machine designed to cater to the needs of light-to-heavy duty uniform bottom carton closure applications.

All BestPack units are available in our standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.



OPERATOR REQUIRED



UNIFORM CARTONS



BOTTOM SEAL

110 VOLTS 60 HZ

Power
Requirements

UP TO 40 CPM

Speed


N/A

Air
Requirements

263 - 310 LBS

Shipping
Weight

CARTON RANGE



Length (min. - max.)
(6.0" - U)

Width (min. - max.)
(4.25" - 20.0")

Specifications based on MS20-2

STANDARD FEATURES

- Two Side Belt Drive
- Adjustable Bed Height from 20.5" to 30.0"
- Width Adjustment can be Mounted on Either Side of Carton Sealer
- Tape Roll Lengths: 1,000 yd., 1,500 yd., 2,000 yd.
- Heavy Duty Frame
- UL Approved Electrical Parts
- High Speed Tape Head
- Capable of Interchanging 2" or 3" Tape Heads
- Electrical On/Off Box can be Mounted on Either Side of Carton Sealer
- Exclusive 2" or 3" Pop-out Pressure Sensitive "High Speed" Tape Head with Patented Tab Adjustment and Noise Reduction Arm

OPTIONS

- Spare Parts Kit
- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Interlock Safety Gates
- Infeed/Exit Conveyor w/ L-Bracket Stabilizer
- Food Grade 304 Stainless Steel
- Heavy-Duty Locking Casters

EXTRA ACCESSORIES TO IMPROVE EFFICIENCY



LOCKING CASTERS

The heavy duty locking casters allow the carton sealer quick and easy mobility to other locations.



SPARE TAPE HEAD

Order a spare tape head with your machine to minimize down time. Having a spare will allow you to drop in a tape head with a new roll of tape in no time!



SHORT OR LONG INFEED/EXIT CONVEYOR W/ L-BRACKET STABILIZER

This 19.75" short or 39.5" long conveyor is a great work platform and allows for staging of cartons on the infeed and the exit.



SPARE PARTS KIT

Spare Parts Kits may vary based on machine
Minimize downtime with BestPack's Spare Parts Kit.



SAFETY GATES

Aluminum frame interlock safety gates can be added to the carton sealer for an extra layer of protection. These interlock safety gates protect the operator from all of the moving parts of the carton sealer.



FOOD GRADE 304 STAINLESS STEEL

This machine is available in 304 stainless steel which is food grade safe for food applications.



CARTON SEALING TAPE

Put high quality tape on your BestPack Carton Sealer. Make sure to order machine length rolls for your new carton sealer.



HIGH SPEED MOTOR

High Speed Motor Upgrade (up to 125 ft.)

POPULAR MS BOTTOM ONLY MODELS

Please refer to comparison chart for complete list of models.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.**	SHIPPING WEIGHT (LBS)
MS20-2 2" Tape Head	(39.5") x (28.3") x (29.4")	(6.0" - U) x (4.25" - 20.0")	(20.5" - 30.0")	Up to 40	263
MS20-3 3" Tape Head	(39.5") x (28.3") x (29.4")	(6.0" - U) x (5.25" - 20.0")	(20.5" - 30.0")	Up to 40	263
MS30-2 2" Tape Head	(39.5") x (39.4") x (29.4")	(6.0" - U) x (4.25" - 30.0")	(20.5" - 30.0")	Up to 40	310
MS30-3 3" Tape Head	(39.5") x (39.4") x (29.4")	(6.0" - U) x (5.25" - 30.0")	(20.5" - 30.0")	Up to 40	310

Information subject to change without notice.

U - Unlimited
* Outside Dimensions Only
** Based on Customer Application



BESTPACK

For more information please go to:
WWW.BESTPACK.COM or call us at **1.888.588.2378**

© 2024 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.