

AUTOMATIC UNIFORM 4-EDGE

CARTON SEALING SOLUTION




QUICK HIGHLIGHTS

SEALS UP TO 8 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Seals All Four Outside Carton Edges Including All Corners
- 90 Degree Carton Turn Using Front Side Carton Infeed
- Seals Uniform Sized Cartons Without Stopping For Adjusting
- 4-edge Sealing to Add Protection from Pilfering and Outside Environments
- Available with Left or Right Infeed




Note: Unit shown with front right side infeed. Also available with a front left side infeed.

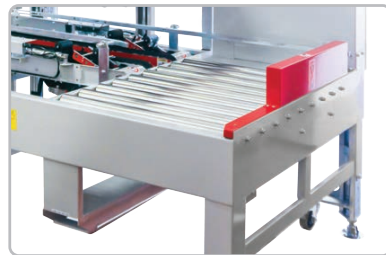

CARTON RANGE

Specifications based on AT4EL22

| Length (min. - max.) | Width (min. - max.) | Height (min. - max.) |
|-------------------------|------------------------|-------------------------|
| (10.3" - 23.5") | (9.8" - 23.5") | (9.8" - 23.5") |



AT4E

AUTOMATIC TOP & BOTTOM 4-EDGE CARTON SEALER

The BestPack™ AT4E Series is an adjustable operator-free, four outer edge carton sealer, using pressure sensitive tape. The AT4E is designed to eliminate costly hand taping of the four outer edges where pilfer proofing and protection of your product from outside environment is necessary. The unit includes a front side entry for a 90 degree directional carton turn before entering into the four edge sealing station.




FREE PRODUCT SUPPORT:
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION


WWW.BESTPACK.COM

VERSION 5.0_0324

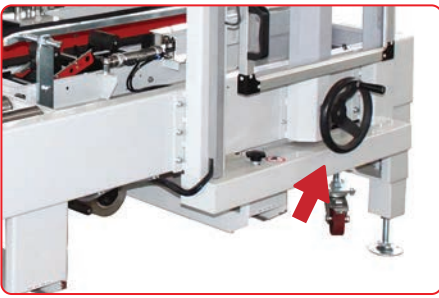


UNIFORM WIDTH & HEIGHT ADJUSTMENT

Ability to adjust width & height allowing you to seal a wide set of uniform box sizes

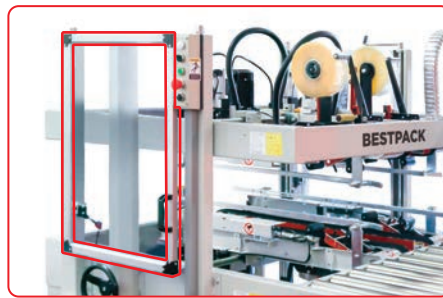

INTERLOCK SAFETY GATES

Providing safety and preventing workplace injury.

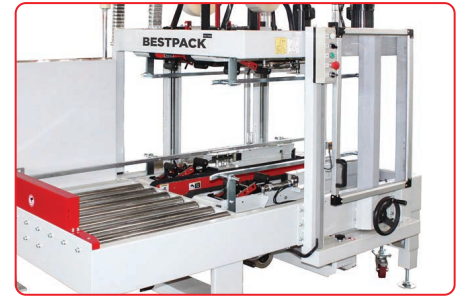

"CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.



CORNER SEAL BRUSH WIPER

Wipes down the corner to ensure a more secure seal on your box.



LOW TAPE/NO TAPE SENSORS


Low tape, no tape, and no cut monitoring system notifies the user of potential downtime.



HEAVY DUTY UPPER ASSEMBLY

MACHINE FOOTPRINT

Specifications based on AT4EL22

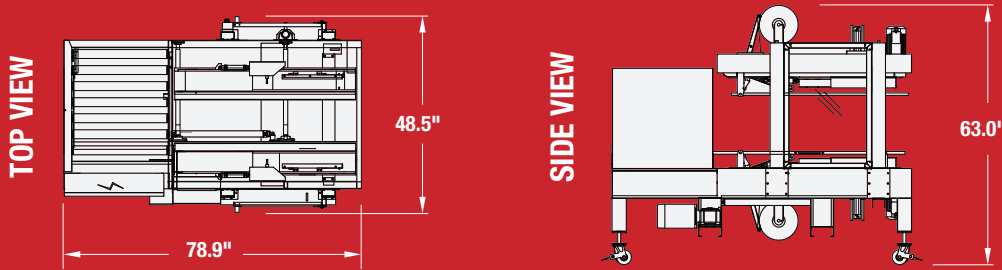

Note: Dimensions are all subject to change without prior notification.

OPTIONS

- Available In:
 - Left Infeed
 - Right Infeed
 - Straight Infeed
- Available in Stainless Steel

POPULAR AT4E MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

| MODEL | MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT | CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.) | CONVEYOR HEIGHT HEIGHT (min. - max.) | CARTONS PER MIN. | SHIPPING WEIGHT (LBS) | POWER REQUIREMENTS | AIR REQUIREMENTS |
|----------------------------|---|--|---|---------------------|--------------------------|-----------------------|----------------------|
| AT4E 22-3 3" Tape Head | (78.9") x (48.5") x (63.0") | (10.3" - 23.5") x (9.8" - 23.5") x (9.8" - 23.5") | Determined at the time of order | Up to 8 | 1,470 | 110 Volts 60 Hz | 80 PSI, 10 SCFM |
| AT4E 22-2 2" Tape Head | (78.9") x (48.5") x (63.0") | (10.3" - 23.5") x (9.8" - 23.5") x (9.8" - 23.5") | Determined at the time of order | Up to 8 | 1,470 | 110 Volts 60 Hz | 80 PSI, 10 SCFM |
| AT4EL22-3S 3" Tape Head | (78.9") x (48.5") x (63.0") | (10.3" - 23.5") x (9.8" - 23.5") x (9.8" - 23.5") | Determined at the time of order | Up to 8 | 1,550 | 110 Volts 60 Hz | 80 PSI, 10 SCFM |
| AT4ES22-3 3" Tape Head | (110.3") x (49.8") x (60.5") | (10.3" - 23.5") x (9.8" - 23.5") x (9.8" - 23.5") | Determined at the time of order | Up to 5 | 1,970 | 110 Volts 60 Hz | 100 PSI, 10+ SCFM |

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

ALL MODELS AVAILABLE IN HIGH SPEED & STAINLESS STEEL



For more information please go to:
WWW.BESTPACK.COM or call us at **1.888.588.2378**