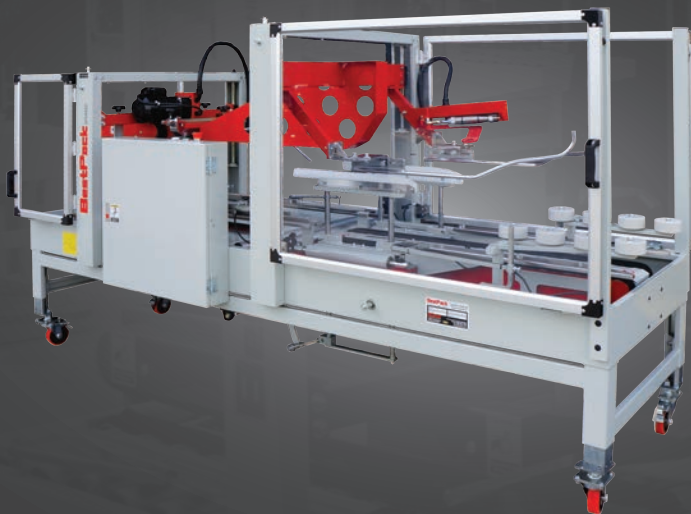



**BESTPACK**

ATFXU

AUTOMATIC FRUIT BOX CARTON SEALER

The BestPack ATFXU Series is an operator-free carton sealer designed to cater to the heavy duty needs of HSC carton usage. Using pressure sensitive tape to seal cartons, the ATFXU was designed for oranges, lemons, potatoes, and other produce. It has four stations: an indexer station, a positive outer sleeve lifting station with vibration that is activated only if the outer sleeve does not lift, a flap folding station, leading to a final station which seals the top and bottom flaps, leaving the top and bottom flaps sealed but not tabbed together.


All BestPack units are available in our standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.

**NO OPERATOR REQUIRED****UNIFORM CARTONS****TOP & BOTTOM SEAL****220 VOLTS 3 PHASE**Power
Requirements**UP TO 38 CPM**

Speed

90 PSI, 8 SCFMAir
Requirements**1,098 LBS**Shipping
Weight

CARTON RANGE

Length (min. - max.)
(16.7" - 23.3")Width (min. - max.)
(11.6" - 15.3")Height (min. - max.)
(5.3" - 10.5")

Specifications based on ATFXU22-2

STANDARD FEATURES

- Heavy Duty 3mm Frame CNC Cut and Welded Frame Including Upper Welded Legs
- Unique Positive Outer Sleeve Lifting Station
- Rear Minor Flap Side Action Kicker
- Heavy Duty Maintenance Free Oil-less Air Cylinder
- Capable of Interchanging 2" or 3" High Speed BestPack Tape Heads
- High Speed Top and Bottom Belt Drive
- Quick Change Belt Drive Assembly Tracks
- Belt Drives are Equipped w/ a "V" Guide
- Self Centering Guide Rails
- Width/Height Adjustment Handle can be Mounted on Either Side of the Carton Sealer
- Upper Side Compression Unit
- Interlock Safety Gates
- Tape Roll Lengths: 1,000 yd., 1,500 yd., 2,000 yd.
- UL Approved Electrical Parts
- Exclusive 2" or 3" Pop-out Pressure Sensitive "High Speed" Tape Head with Patented Tab Adjustment and Noise Reduction Arm

SEALER INCLUDES FOUR STATIONS:

- 1) An Indexer Station
- 2) A Positive Outer Sleeve Vibrating Lifting Station, the Vibration Performs Only if the Outer Sleeve of the Carton Fails to Lift.
- 3) A Flap Fold Station Closes the Top Flaps.
- 4) A Final Station Seals the Top and Bottom Flaps Leaving the Top and Bottom Flaps Sealed But Not Tabbed Together.

OPTIONS

- Spare Parts Kit
- Low and/or No Tape Alarm & Sensor System
- Infeed/Exit Conveyor w/ L-Bracket
- Food Grade 304 Stainless Steel

WWW.BESTPACK.COM

VERSION 4.2_0921

QUALITY • INNOVATION • COMMUNITY

© 2022 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.

EXTRA ACCESSORIES TO IMPROVE EFFICIENCY



SPARE PARTS KIT

Spare Parts Kits may vary based on machine
Minimize downtime with BestPack's Spare Parts Kit.



SPARE TAPE HEAD

Order a spare tape head with your machine to minimize down time. Having a spare will allow you to drop in a tape head with a new roll of tape in no time!



LOW OR NO TAPE SENSOR

The low tape light allows the operator to prepare a new roll of tape. The no tape alarm will inform the operator of the error so that the carton may be resealed.



FOOD GRADE 304 STAINLESS STEEL

This machine is available in 304 stainless steel which is food grade safe for food applications.



CARTON SEALING TAPE

Put high quality tape on your BestPack Carton Sealer. Make sure to order machine length rolls for your new carton sealer.

POPULAR AFXU MODELS

Please refer to comparison chart for complete list of models.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)
AFXU22-2 2" Tape Head	(107.5") x (40.3") x (58.7")	(16.7" - 23.3") x (11.6" - 15.3") x (5.3" - 10.5")	(24.0" - 31.0")	Up to 38	1,098
AFXU22-3 3" Tape Head	(107.5") x (40.3") x (58.7")	(16.7" - 23.3") x (11.6" - 15.3") x (5.3" - 10.5")	(24.0" - 31.0")	Up to 38	1,098

Information subject to change without notice.

* Other Conveyor Heights Available



BESTPACK

For more information please go to:
WWW.BESTPACK.COM or call us at **1.888.588.2378**

© 2022 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.