

# BESTPACK'S FLAGSHIP PRESSURE SENSITIVE ACRYLIC CARTON SEALING TAPE



TEMPERATURE-RESISTANT  
WATER-BASED ACRYLIC

## QUICK HIGHLIGHTS

- Unlimited Shelf Life
- UV Light Resistant
- Specially Formulated 110% Elongation Low Stretch Cast Film  
(Increasing Machine Length Roll Performance)
- Specially Formulated ROHM & HAAS  
(for use in Hot & Cold Temperature)
- RoHS Compliant
- Meets FDA Food Requirements for Indirect Food Contact

|  |                               |                                |
|--|-------------------------------|--------------------------------|
| <b>1.6 MIL</b><br>(40 MICRON)*                               | <b>16 oz/inch</b><br>WIDTH*** | <b>0.6 MIL</b><br>(15 MICRON)* |
| Total Thickness  | Peel Adhesion                 | Adhesive Thickness             |
| <b>1.0 MIL</b><br>(25 MICRON)*                               | <b>20 LBS/IN</b><br>WIDTH**   | <b>110%**</b>                  |
| Film Thickness   | Tensile Strength              | Elongation % At Break          |
| Test Methods: * ASTM D-3652; ** ASTM D-3759; *** ASTM D-3330 |                               |                                |

|  |   |   |
|--|---|---|
| <b>SERVICE TEMPERATURE</b>                   | <b>USAGE &amp; STORAGE TEMPERATURE</b>      | <b>IDEAL STORAGE TEMPERATURE</b>  |
| Minimum Temp.: -30°F<br>Maximum Temp.: 200°F | Minimum Temp.: 32°F<br>Maximum Temp.: 150°F | Ideal Storage Temp.: 77°F +/- 5°F<br>Ideal Storage Humidity: 55% +/- 5% |


Values obtained from tests do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. BestPack recommends the user to determine whether the product is fit for a particular purpose and is suitable for the user's method of application.  
\*Contact Your Local BestPack Representative for More Information



### LEARN MORE ABOUT OUR TAPE:

**BROCHURES | MATERIAL SAFETY DATA SHEET | ROHS INFORMATION**


#### AVAILABLE COLORS:



#### AVAILABLE LENGTHS:



#### AVAILABLE WIDTHS:

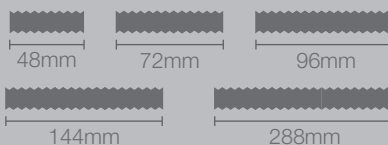

## BP16

**1.6 MIL (40 MICRON) TOTAL TAPE THICKNESS  
25 MICRON CAST BOPP LOW ELONGATION FILM  
ROHM & HAAS ACRYLIC ADHESIVE**

BP16 is a premium box sealing tape used primarily for light carton sealing applications. This tape performs well in a broad temperature range.