

LIGHT TO HEAVY DUTY

HOT MELT CARTON SEALING TAPE



INSTANT ADHESION
TO CARTONS

QUICK HIGHLIGHTS

- Great Initial Tack
- Consistent & Easy Release
- Specially Formulated 110% Elongation Low Stretch Cast Film
(Increasing Machine Length Roll Performance)
- Specially Formulated ROHM & HAAS
(for use in Hot & Cold Temperature)
- RoHS Compliant
- Meets FDA Food Requirements for Indirect Food Contact

1.6 MIL (40 MICRON)*	30 oz/inch WIDTH***	0.6 MIL (15 MICRON)*
Total Thickness	Peel Adhesion	Adhesive Thickness
1.0 MIL (25 MICRON)*	19 LBS/IN WIDTH**	110%**
Film Thickness	Tensile Strength	Elongation % At Break
Test Methods: * ASTM D-3652; ** ASTM D-3759; *** ASTM D-3330		

SERVICE TEMPERATURE	USAGE & STORAGE TEMPERATURE	IDEAL STORAGE TEMPERATURE
Minimum Temp.: -30°F Maximum Temp.: 140°F	Minimum Temp.: 32°F Maximum Temp.: 104°F	Ideal Storage Temp.: 77°F +/- 5°F Ideal Storage Humidity: 55% +/- 5%

Values obtained from tests do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. BestPack recommends the user to determine whether the product is fit for a particular purpose and is suitable for the user's method of application.

*Contact Your Local BestPack Representative for More Information



LEARN MORE ABOUT OUR TAPE:

[BROCHURES](#) | [MATERIAL SAFETY DATA SHEET](#) | [ROHS INFORMATION](#)


AVAILABLE COLORS:



AVAILABLE LENGTHS:



AVAILABLE WIDTHS:

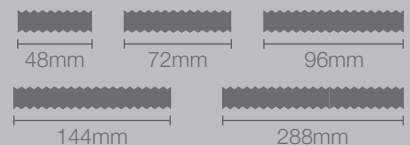

HT16

1.6 MIL (40 MICRON) TOTAL TAPE THICKNESS
25 MICRON CAST BOPP LOW ELONGATION FILM
ROHM & HAAS ACRYLIC ADHESIVE

HT16 is an economy grade carton sealing tape, perfect for light-duty sealing.