

LIGHT TO HEAVY DUTY

HOT MELT CARTON SEALING TAPE



INSTANT ADHESION
TO CARTONS

QUICK HIGHLIGHTS

- Great Initial Tack
- Consistent & Easy Release
- Specially Formulated 140% Elongation Low Stretch Cast Film
(Increasing Machine Length Roll Performance)
- Specially Formulated ROHM & HAAS
(for use in Hot & Cold Temperature)
- RoHS Compliant
- Meets FDA Food Requirements for Indirect Food Contact

3.0 MIL (76 MICRON)* Total Thickness	60 oz/inch WIDTH*** Peel Adhesion	1.0 MIL (26 MICRON)* Adhesive Thickness
2.0 MIL (50 MICRON)* Film Thickness	33 LBS/IN WIDTH** Tensile Strength	140%** Elongation % At Break
Test Methods: * ASTM D-3652; ** ASTM D-3759; *** ASTM D-3330		

SERVICE TEMPERATURE Minimum Temp.: -30°F Maximum Temp.: 140°F	USAGE & STORAGE TEMPERATURE Minimum Temp.: 32°F Maximum Temp.: 104°F	IDEAL STORAGE TEMPERATURE Ideal Storage Temp.: 77°F +/- 5°F Ideal Storage Humidity: 55% +/- 5%
--	---	---

Values obtained from tests do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. BestPack recommends the user to determine whether the product is fit for a particular purpose and is suitable for the user's method of application.

*Contact Your Local BestPack Representative for More Information




LEARN MORE ABOUT OUR TAPE:

BROCHURES | MATERIAL SAFETY DATA SHEET | ROHS INFORMATION


AVAILABLE COLORS:



AVAILABLE LENGTHS:



AVAILABLE WIDTHS:

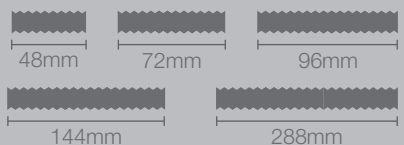

HT30

**3.0 MIL (76 MICRON) TOTAL TAPE THICKNESS
50 MICRON CAST BOPP LOW ELONGATION FILM
ROHM & HAAS ACRYLIC ADHESIVE**

HT30 is a heavy duty grade carton sealing tape for those applications needing a strong and sturdy seal.