





Cannot be combined with other BestPack Promotions.

Promo subject to end without notice.



For more information, please contact your local BestPack representative.

WWW.BESTPACK.COM VERSION 2.12_0625

MANUAL SIDEDRIVE SIMPLE PACK / SEAL SYSTEM

MAJOR FEATURES

- Two Belt Side Driven
- Telescopic Mast Design
- Extra 4" Carton Height Adjustment Available on Upper Assembly
- Adjustable Bed Height: 27.5" to 34.0"
- Width/Height Adjustment available for either side of carton sealer
- Exclusive 4 Roller Upper Side Compression
- Tape Roll Lengths: 1000 vd., 1500vd., 2000vd.
- Heavy Duty Frame
- UL Approved Electrical Parts
- Capable of Interchanging 2" or 3" Tape Heads
- Electrical on/off box can be mounted on either side of carton sealer.

STANDARD FEATURES


- Exclusive Pop-Out Pressure sensitive "high-speed" Tape Head with patented tab adjustment and noise reduction arm
- Operation manual

SYSTEM SPECIFICATIONS

- Power Requirements: 110 Volts 60Hz
- Tape Head: Standard: 2", Available: 3"
- System Shipping Weight: 495 lbs.



MSD SIMPLE SYSTEM FOOTPRINT

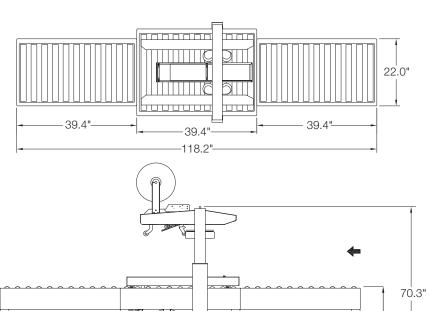

MSD SIMPLE SYSTEM COMPARISON CHART

| MODEL | SYSTEM DIMENSIONS Length × Width × Height | CARTON RANGE* Length (min max.) x Width (min max.) x Height (min max.) | CONVEYOR HEIGHT ADJUSTMENT Height (min max.) | SHIPPING Weight (LBS.) |
|--------------------------------|--|--|---|---------------------------|
| MSD22-2 2" Tape Head | (118.2") x (32.8") x (70.3") | (6.0" - U) x (4.25" - 20.0") x (3.5" - 20.5") | (27.5" - 34.0") | 495 |
| MSD22-3 3" Tape Head | (118.2") x (32.8") x (70.3") | (6.0" - U) x (5.25" - 20.0") x (3.5" - 20.5") | (27.5" - 34.0") | 495 |

*Outside Dimensions Only U - Unlimited

31.0"

