




# BESTPACK

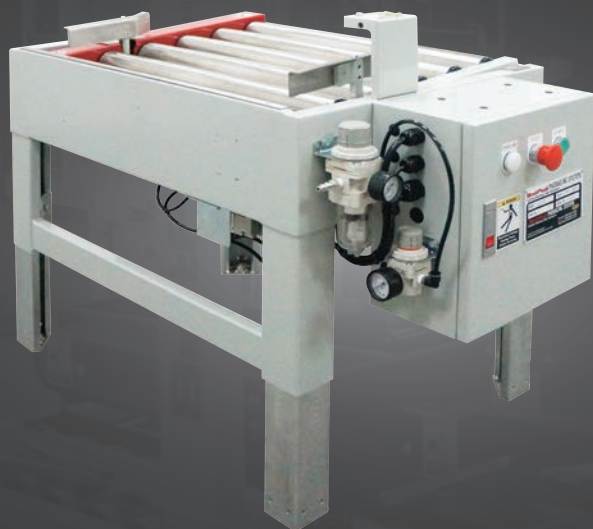

## CRX

### USED FOR CENTERING & TIMING RANDOM CARTONS

The CRX is a center and timing unit that is intended to function in front of modified RS or RQ Top and Bottom Semi-Automatic Random Carton Sealers. Combining the CRX and the modified RS or RQ Sealer, these two units will then function as a fully automatic random carton sealing system. The CRX automatically centers and times a carton into the modified Semi-Automatic Random Sealer thereby allowing the sealer to function as a Fully Automatic Carton Sealer. This application requires the top flaps to have been already closed and tabbed closed by either a label or a small piece of tape before being completely sealed top and bottom by the random sealer. The two units cost much less than a standard fully automatic random sealer and has a smaller footprint where space may be an issue. All BestPack units are available in our standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.



NO OPERATOR REQUIRED



RANDOM CARTONS



INDEXING

**110 VOLTS 60 HZ**

Power  
Requirements

**UP TO 10 CPM**

Speed


**90 PSI, 5 SCFM**

Air  
Requirements

**260 LBS**

Shipping  
Weight

## CARTON RANGE



Length (min. - max.)

**(9.0" - 30.0")**

Width (min. - max.)

**(6.3" - 20.0")**

Height (min. - max.)

**(4.0" - 21.0")**

## STANDARD FEATURES

- Heavy Duty 2mm CNC Cut and Welded Frame Including Upper Welded Legs
- Random Self-centering Arms to Center the Carton Before the Carton is Fed into the Sealer Station
- Powered Rollers with a Drop and Stop Feature for Positive Carton Timing Into the Modified RS or RQ Sealer
- Adjustable Timer Connected to the Powered Rollers for Random Carton Space Separation Allowing the Carton to Feed Completely Through the Sealer Before Allowing the Next Random Sized Carton in to the Sealer
- Heavy Duty Maintenance Free Oil-less Air Cylinder
- UL Approved Electrical Parts

## EXTRA ACCESSORIES TO IMPROVE EFFICIENCY



### LOCKING CASTERS

The heavy duty locking casters allow the carton sealer quick and easy mobility to other locations.



### SPARE TAPE HEAD

Order a spare tape head with your machine to minimize down time. Having a spare will allow you to drop in a tape head with a new roll of tape in no time!




### SAFETY GATES

Aluminum frame interlock safety gates can be added to the carton sealer for an extra layer of protection. These interlock safety gates protect the operator from all of the moving parts of the carton sealer.



### ON/OFF SWITCH

With the additional ON/OFF control box you can stop and start the carton sealer, no matter what side the operator is on.



### LEG EXTENSIONS

Allows the sealer to reach conveyor pass through heights that are taller than normal in a production line.

## POPULAR CRX MODELS

Please refer to comparison chart for complete list of models.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)
CRX20H	(39.5") x (22.5") x (25.0")	(9.0" - 30.0") x (6.3" - 20.0") x (4.0" - 21.0")	(20.5" - 30.0")	Up to 10	260

Information subject to change without notice.

All Models available in High Speed & Food Grade 304 Stainless Steel



**BESTPACK**

For more information please go to:  
**WWW.BESTPACK.COM** or call us at **1.888.588.2378**

© 2021 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.