


MSBFT

SEMI AUTOMATIC UNIFORM BOTTOM CARTON SEALER

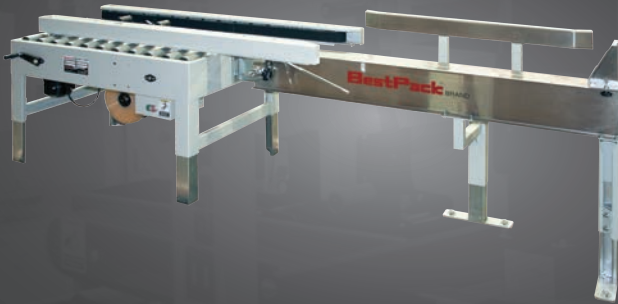


The BestPack™ MSBFT Series is a uniform operator-fed, bottom carton sealer designed to reduce operator time and fatigue when folding & sealing the bottom flaps of a carton. Another advantage of using the MSBFT compared to hand taping, the quality of the seal and the appearance of the carton is greatly improved. This unit many times is used when carton-forming volume has become too large to manually form and tape the cartons completely by hand, but the volume is too small to justify a fully automatic carton erector/sealer.

All BestPack units are available in our standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.

ERECTOR PROCESS: The carton erector has two stations. The first station folds the bottom flaps of the carton and the second station seals the bottom flaps and feeds the carton automatically on to a conveyor.



OPERATOR REQUIRED



UNIFORM CARTONS



BOTTOM SEAL ONLY

110 VOLTS 60 HZ

Power
Requirements

UP TO 15 CPM

Speed


N/A

Air
Requirements

350 LBS

Shipping
Weight

CARTON RANGE



Length (min. - max.)
(7.8" - 23.6")

Width (min. - max.)
(7.8" - 19.6")

Height (min. - max.)
(4.0"+")

Specifications based on MSBFT20-2

STANDARD FEATURES

- Heavy Duty Frame
- Uniform Bottom Flap Folder/Bottom Sealer
- Extended Belt Drive for Positive Carton Feed
- Stainless Steel "T" rail for Durability and Minimal Carton Friction as the Carton is Formed
- Operator can work from Either Side of the Carton Sealer
- Adjustable Bed Height from 23.5" to 30.0"
- Tape Roll Lengths: 1,000 yd., 1,500 yd., 2,000 yd.
- UL Approved Electrical Parts
- Capable of Interchanging 2" or 3" Tape Heads
- Exclusive 2" or 3" Pop-out Pressure Sensitive "High Speed" Tape Head with Patented Tab Adjustment and Noise Reduction Arm

OPTIONS

- Spare Parts Kit
- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Food Grade 304 Stainless Steel
- Locking Casters w/ Support Brackets
- Long Exit Conveyor

EXTRA ACCESSORIES TO IMPROVE EFFICIENCY



LOCKING CASTERS

The heavy duty locking casters allow the carton sealer quick and easy mobility to other locations.



SPARE TAPE HEAD

Order a spare tape head with your machine to minimize down time. Having a spare will allow you to drop in a tape head with a new roll of tape in no time!



SHORT OR LONG INFEED/EXIT CONVEYOR W/ L-BRACKET STABILIZER

This 19.75" short or 39.5" long conveyor is a great work platform and allows for staging of cartons on the infeed and the exit.



SPARE PARTS KIT

Spare Parts Kits may vary based on machine
Minimize downtime with BestPack's Spare Parts Kit.



FOOD GRADE 304 STAINLESS STEEL

This machine is available in 304 stainless steel which is food grade safe for food applications.



CARTON SEALING TAPE

Put high quality tape on your BestPack Carton Sealer. Make sure to order machine length rolls for your new carton sealer.



HIGH SPEED MOTOR

High Speed Motor Upgrade (up to 125 ft.)

POPULAR MSBFT MODELS

Please refer to comparison chart for complete list of models.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)
MSBFT20-2 2" Tape Head	(99.6") x (28.4") x (29.4")	(7.8" - 23.6") x (7.8" - 19.6") x (4.0"+)	(23.5" - 30.0")	Up to 15	350
MSBFT20-3 3" Tape Head	(99.6") x (28.4") x (29.4")	(7.8" - 23.6") x (7.8" - 19.6") x (4.0"+)	(23.5" - 30.0")	Up to 15	350

Information subject to change without notice.

*Outside Dimensions Only
U - Unlimited



BESTPACK

For more information please go to:
WWW.BESTPACK.COM or call us at **1.888.588.2378**

© 2021 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.