

ESH CARTON ERECTOR APPLICATION SURVEY FORM

End User			Dealer				
Company Name			Com	pany Name			
Address			Address				
Contact			Contact				
Title			Title				
TelFax			Tel Fax				
\wedge	Length	Width	Height	Weight	% of Production	Carton Status	
						New	
W H							
						Re-Used	
						Sample Carton Sent	
*						Yes No	
\checkmark						Yes No	

ERECTOR TYPE / CARTON TYPE

ESHT TYPE - CARTON PULLED FROM THE HOPPER AT THE TOP OF THE CARTON STACK

ESHB TYPE – CARTON PULLED FROM THE HOPPER AT THE BOTTOM OF THE CARTON STACK

RSC TYPE CARTON

FOL TYPE CARTON

OTHER TYPE CARTON

REQUIREMENTS:

2" TAPE	3" TAPE
---------	---------

For fully automatic applications it is the responsibility of the end user to inform their corrugator that the cartons need to be well scored, with proper glue joints, and 3/8" or larger slots.


PRODUCTION RATE	CONVEYOR INFORMATION	ELECTRICAL EQUIREMENT	PACKING ROOM CONDITIONS
CARTONS PER MINUTE	HEIGHT	110V 1-PHASE	TEMPERATURE
CARTONS PER HOUR	EXIT POWERED	240V 1-PHASE	NORMAL
CARTONS PER SHIFT		208V 3-PHASE	WET
CARTONS PER DAY		480V 3-PHASE	DUSTY
			CORROSIVE
MODEL RECOMMENDED:			

COMMENTS:

WWW.BESTPACK.COM

VERSION 1.2_1122

EXPERIENCE • COMMITMENT • COMMUNIT

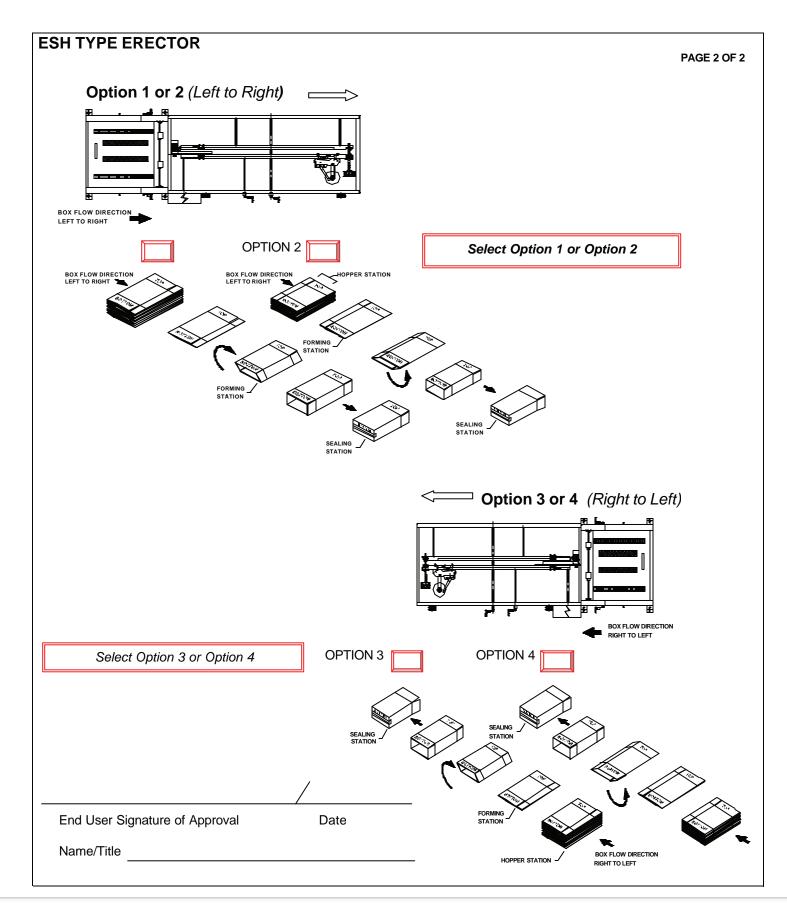



For more information please go to: WWW.BESTPACK.COM or call us at 1.888.588.2378

© 2021 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.