

PP-5545TBH + PP-5030LX

INTERMITTENT MOTION SIDE-SEALER & SHRINK TUNNEL

Meet the high-speed side sealing solution that will automate your packing for long products. This solution was built with an intermittent sealing motion with for both speed and economy. Equipped with a sturdy HMI providing the operator with easy to read and adjust operational parameters. The PP-5545TBH is equipped with a servo motor allowing for a high-speed design with a sealing capacity of up to 65 packages per minute. The side sealing machine is also equipped with a one-piece, Teflon coated, heat-resistant alloy blade.

UP TO 60 PPM

Production Rate for PP-5545TBH + PP-5030LX
SIDE SEALER & SHRINK TUNNEL

SEALER SPECIFICATIONS

220V 1 PH 15 AMP <small>Electrical</small>	3 kw (3,000 watts) <small>Power</small>	4-5 CFM AT 80 PSI <small>Air</small>
--	---	--

(82.7" x 58.3" x 51.5")

Machine Dimensions (L x W x H):

Specifications based on
PP-5545TBH

TUNNEL SPECIFICATIONS

220V 3 PH 45 AMP <small>Electrical</small>	16 kw 1HP MOTOR <small>Power</small>
--	--

(73.7" x 40.7" x 51.4")

Machine Dimensions (L x W x H):

Specifications based on
PP-5030LX

STANDARD FEATURES INCLUDE

SEALER TECHNICAL FEATURES

- Hi-speed side sealing structure, intermittent motion, without limit for product length.
- The HMI, with iconic operation, has easy to operate recordable parameters
- Servo-driven cross sealing, other motors controlled by inverters, hi-speed design with capacity from 20 up to 60 pieces per minute
- One-piece easy to clean, heat resistant, Teflon coated, alloy blade, for strong cross seals.
- Anti—Jam Safety Feature on Conveyor

TUNNEL TECHNICAL FEATURES



- Convenient tunnel window and light makes it easier to fine tune the shrinking process
- Conveyor speed and air volume controlled by inverters, self cooling tunnel rollers, easy to adjust vent holes
- Coffin-style tunnel chamber for easy maintenance and cleaning



SCOPE OF APPLICATION



PP-5545TBH+PP-5030LX FOOTPRINT

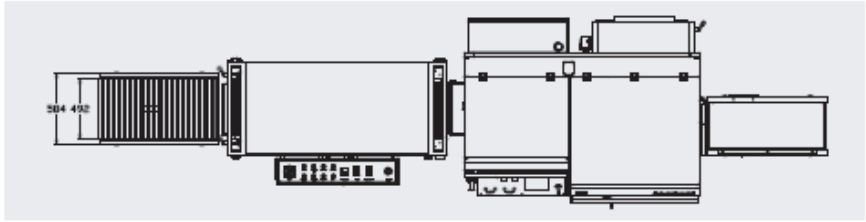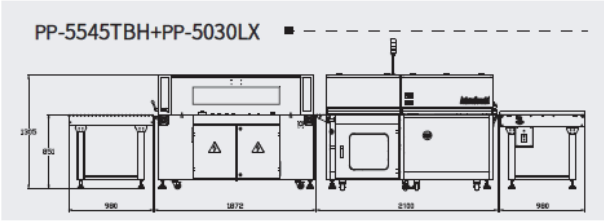

SIDE SEALING PACKING MODELS

MODEL	MACHINE DIMENSION LENGTH x WIDTH x LENGTH	MAX PACKING SIZE LENGTH x WIDTH x HEIGHT	CROSS SEALING SIZE LENGTH/HEIGHT	APPLICABLE FILM	PRODUCT RATE	SHIPPING WEIGHT (LBS)
PP-5545TBH	(82.7" x 58.3" x 51.5")	(U" x 15.7" x 15.7")	(20.5" x 5.9")	POF/PE	20-60 ppm	1,764 lbs.
PP-5560TBH	(89.2" x 63.3" x 56.1")	(U" x 23.6" x 23.6")	(24.4" x 5.9")	POF/PE	20-60 ppm	1,984 lbs.
PP-5580TBH	(98.3" x 68.9" x 52.4")	(U" x 27.6" x 27.6")	(32.7" x 5.9")	POF/PE	20-60 ppm	2,205 lbs.

SHRINK TUNNEL MODELS

MODEL	MACHINE DIMENSION LENGTH x WIDTH x LENGTH	TUNNEL CHAMBER SIZE LENGTH x WIDTH x LENGTH	MAX PACKING SIZE LENGTH x WIDTH x HEIGHT	APPLICABLE FILM	PRODUCT RATE	SHIPPING WEIGHT (LBS)
PP-5030LX	(73.7" x 40.8" x 51.4")	(59.1" x 19.7" x 11.9")	(51.2" x 15.7" x 9.8")	POF/PE	0-20 ppm	1,433 lbs.
PP-6530LX	(73.7" x 46.7" x 51.4")	(59.1" x 25.6" x 11.9")	(51.2" x 21.7" x 23.6")	POF/PE	0-20 ppm	1,543 lbs.
PP-8030LX	(73.7" x 52.6" x 51.4")	(59.1" x 31.5" x 11.9")	(U" x 27.6" x 27.6")	POF/PE	0-20 ppm	1,653 lbs.