

## AT4E S-Feed Stainless

### Fully Automatic 4-Edge Carton Sealer with Straight Feed

The BestPack AT4E Stainless Steel Series is an operator free, four outer edge carton sealer with corner seals, using pressure sensitive tape. These carton sealers are designed to eliminate costly hand taping of the four outer edges where pilfer proofing and protection of your product from outside environment is necessary. The AT4E Stainless Steel model is designed for uniform edge sealing applications. This unit is designed with an automatic in-line 90 degree box turner.

All BestPack stainless steel sealers are made with food grade 304 stainless steel for 21 CFR 110 compliance and include 304 High Speed stainless steel tape heads. Units are available for either splash resistant or wash-down applications. This unit is also available in standard finish. Standard 3" Tape Head.



## Key Points of the Carton Sealer



**Does Not Require Operator**



**Uniform Cartons**



**4-Edge Seal w/ Corners**

## Features

- Heavy Duty 3mm Welded 304 Food Grade Stainless Steel Frame Including Upper Welded Legs
- Seals All Four Outside Carton Edges Including All Corners
- In-line 90 Degree Carton Turner
- Four Belt Drive System with 1-piece Molded Belts and V-belt Guide
- Top and Bottom Four 3" Pop-Out BestPack High Speed 304 Stainless Steel Tape Heads
- Low Tape/No Tape on Carton/No Cut Sensors with Malfunction Alarm and Three Color Light
- Motor Drive Uniform Height Adjustment
- Heavy Duty Upper Assembly Four Post System
- Heavy Duty SMC Oil-less Cushioned Air-cylinder
- Aluminum Framed Interlock Safety Gates Where Needed
- Tape Roll Length: 1,000 yd.
- Quality UL Approved Electrical Parts

## Options

- Spare Parts Kit
- 304 Stainless MSD or 304 Stainless AS-S
- Infeed/Exit Conveyor w/ L-Bracket Stabilizer

# Extra Accessories to Improve Efficiency



Spare Parts Kit


\*Spare Parts Kit May Vary



High Speed Motor Upgrade  
(Up to 100 ft. per min.)



304 Stainless Steel  
Manual Sidedrive

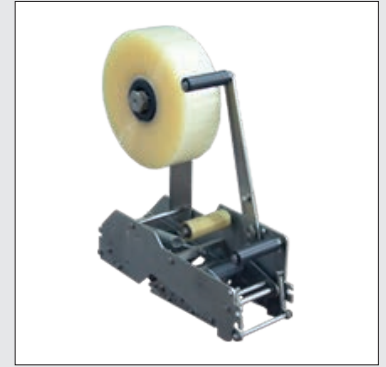

304 Stainless Steel  
Spare Tape Head

- Carton Sealing Tape

## Machine & Carton Specifications

**110 Volts 60 Hz**  
Power Requirements

**Up to 8 Cartons/min.**  
Speed

**80 PSI**  
10 SCFM  
Air Requirements

**1,550 - 1,970 lbs**  
Shipping Weight

Model	Machine Dimensions Length x Width x Height	Carton Range Length (min. - max.) x Width (min. - max.) x Height (min. - max.)	Conveyor Height Adjustment Height (min. - max.)	Cartons per min.	Shipping Weight (lbs.)
AT4ES22-3S <b>3" Tape Head</b>	(110.3") x (49.8") x (60.5")	(10.3" - 23.5") x (9.8" - 23.5") x (9.8" - 23.5")	Determined at the time of order	Up to 8	1,970
Also Available in L-Feed					
AT4EL22-3S <b>3" Tape Head</b>	(78.9") x (48.5") x (63.0")	(10.3" - 23.5") x (9.8" - 23.5") x (9.8" - 23.5")	Determined at the time of order	Up to 8	1,550

Information subject to change without notice.